


LASER 4.7 RIG NUMBER & LETTER SIZES AND POSITIONING


November 2013 Edition

UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 30mm

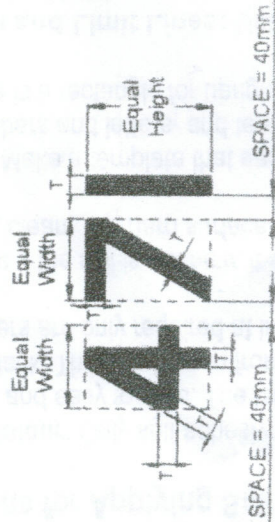


Equal Width
(Except 1, I, M & W)
MINIMUM = 150mm




TEMPLATE

ANGLED NUMBERS AND LETTERS



T = Thickness = MINIMUM 30mm

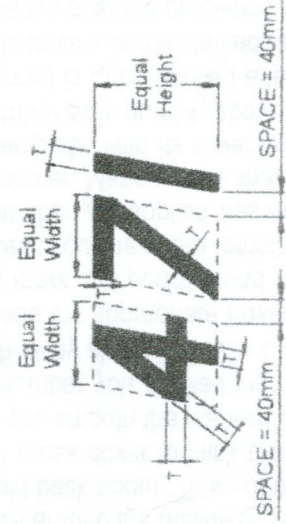

Equal Width
(Except 1, I, M & W)
MINIMUM = 150mm



TEMPLATE

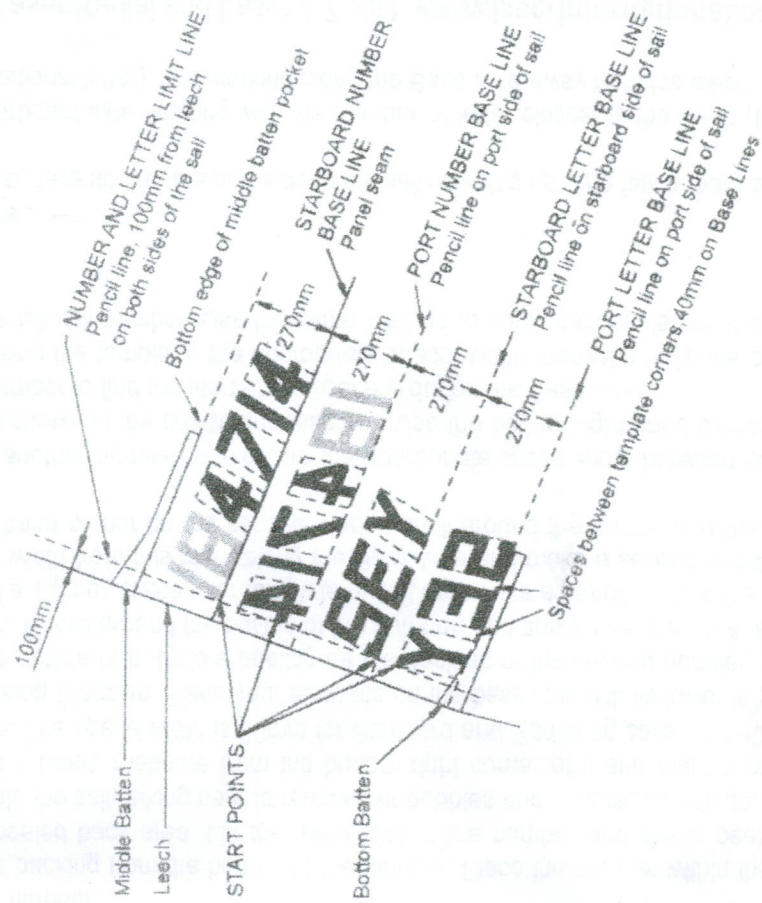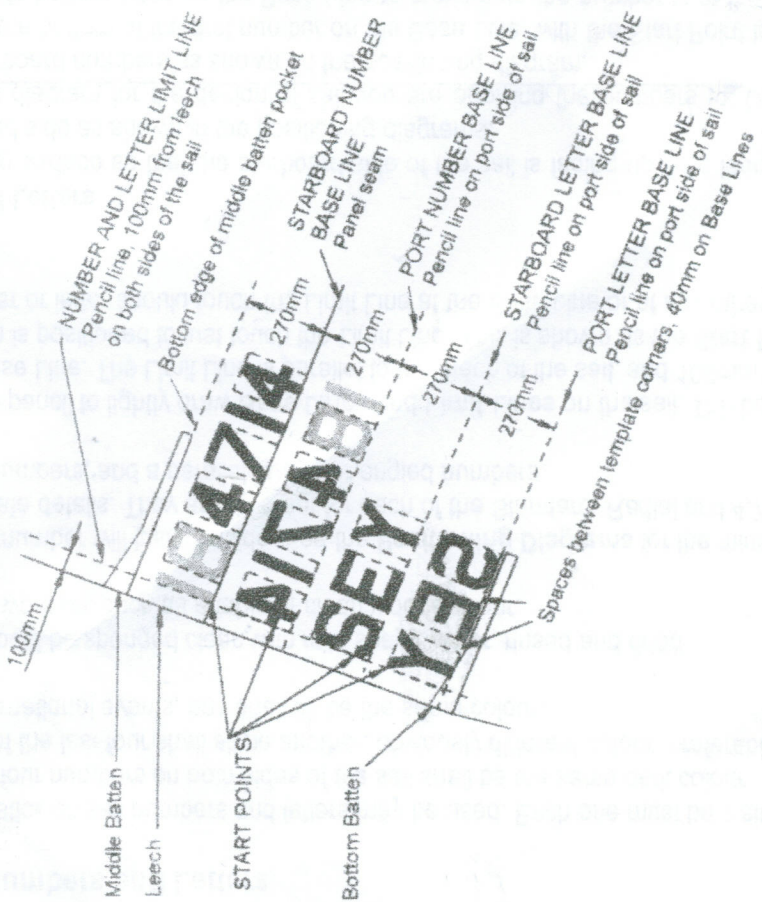

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 30mm, SO USE 40mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK. PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE, COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR. THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.