


# STANDARD MKII RIG NUMBER & LETTER SIZES AND POSITIONING

## UPRIGHT NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm

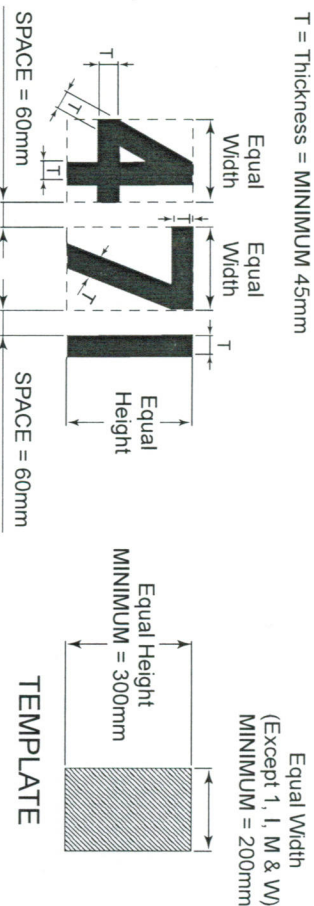

Equal Width


(Except 1, I, M & W)  
MINIMUM = 200mm

Equal Height  
MINIMUM = 300mm

TEMPLATE

## ANGLED NUMBERS AND LETTERS

T = Thickness = MINIMUM 45mm


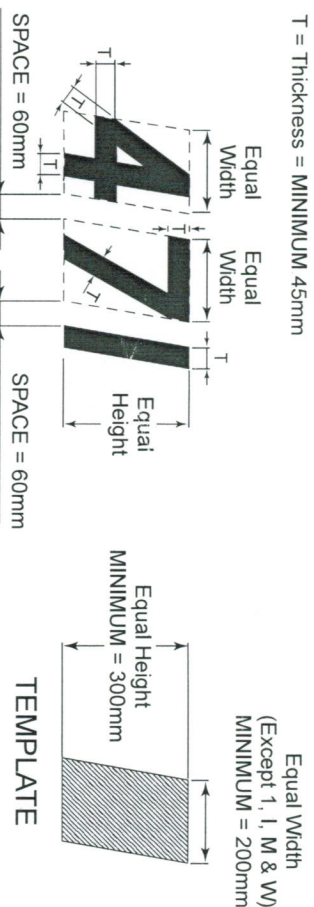


Equal Width

(Except 1, I, M & W)  
MINIMUM = 200mm

Equal Height  
MINIMUM = 300mm

TEMPLATE

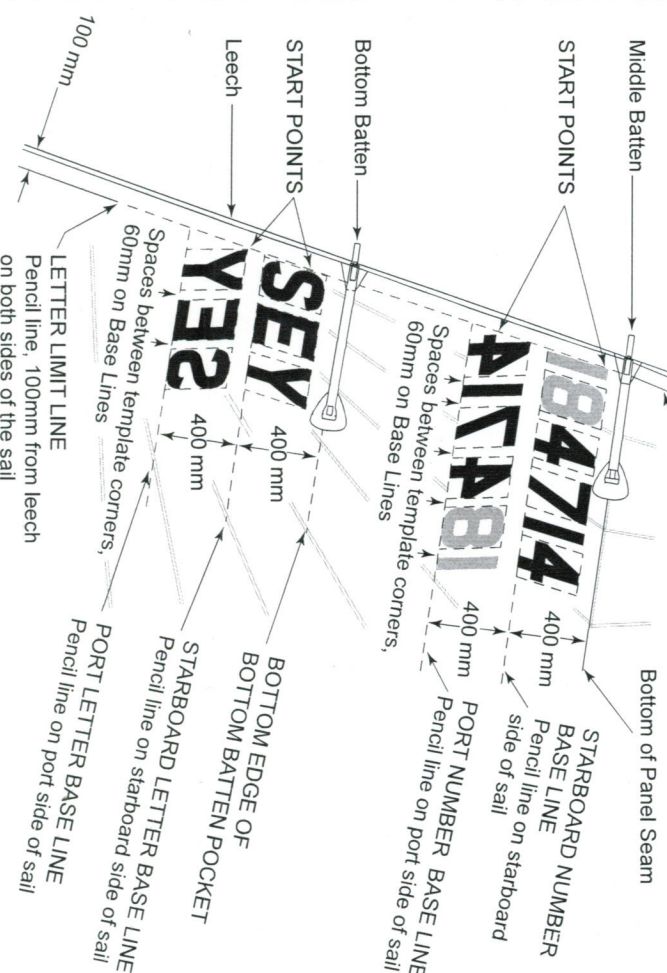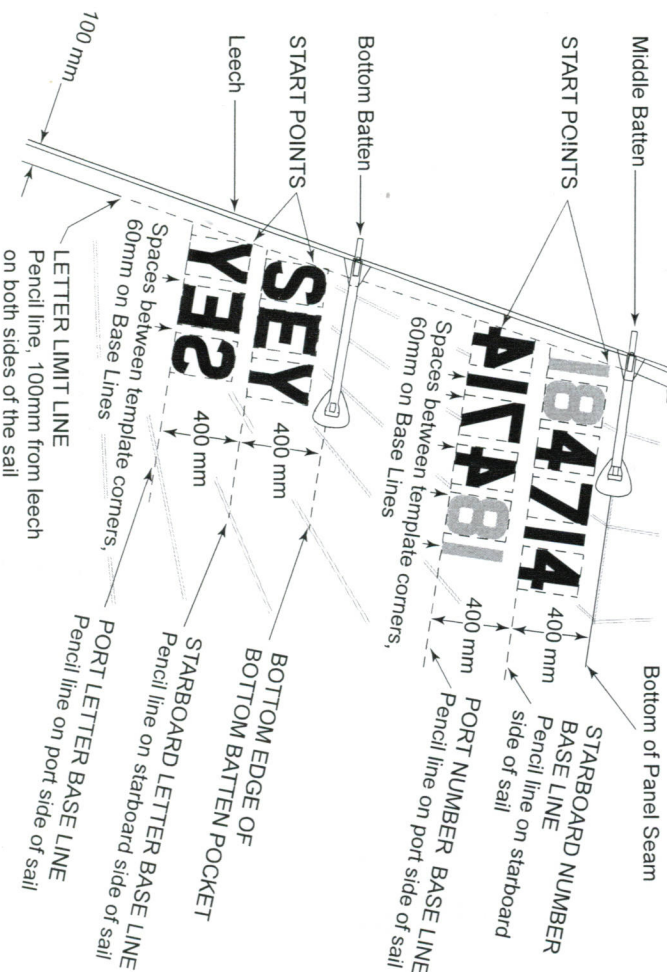

1. MINIMUM SPACE BETWEEN NUMBERS AND LETTERS IN THE CLASS RULES IS 50mm, SO USE 60mm TO ENSURE THAT ANY SMALL ERRORS IN POSITION ARE STILL LEGAL.
2. LAST FOUR DIGITS OF SAIL NUMBER TO BE ONE DARK, DISTINCTIVE COLOUR OR BLACK, PRECEDING DIGITS TO BE A DIFFERENT, CONTRASTING, DISTINCTIVE COLOUR, PREFERABLY RED. ALL NATIONAL LETTERS TO BE ONE COLOUR, THEY MAY BE ONE OF THE COLOURS OF THE SAIL NUMBER DIGITS OR ANOTHER DISTINCTIVE COLOUR.